


Mobile glue presses

Sash clamp and pipe clamping set



Simply better.

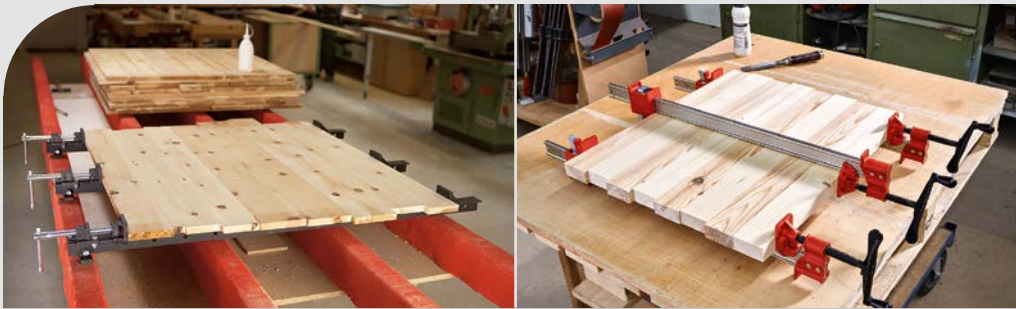

Sash clamp

| Order-No. | Opening mm | Jaw dimensions w x h mm | kg | qty. | V3 |
|--|---------------|-------------------------------|-------|------|----|
| with I-profile 80 x 42 x 3.9 mm | | | | | |
| TAN80 | 800 | 80 x 80 | 7.90 | 1 | |
| TAN120 | 1200 | 80 x 80 | 10.10 | 1 | |
| TAN150 | 1500 | 80 x 80 | 12.20 | 1 | |
| TAN210 | 2100 | 80 x 80 | 15.00 | 1 | |
| TAN250 | 2500 | 80 x 80 | 17.50 | 1 | |
| with T-profile 40 x 40 x 5 mm | | | | | |
| TB100 | 1000 | 66 x 43 | 5.07 | 1 | |
| TB120 | 1200 | 66 x 43 | 5.54 | 1 | |
| TB150 | 1500 | 66 x 43 | 6.03 | 1 | |
| TB210 | 2100 | 66 x 43 | 7.87 | 1 | |
| TB250 | 2500 | 66 x 43 | 9.43 | 1 | |
| light with I-profile 37 x 11 x 4.5 mm | | | | | |
| TL60 | 600 | 48 x 53 | 3.80 | 2 | |
| TL90 | 900 | 48 x 53 | 4.30 | 2 | |
| TL120 | 1200 | 48 x 53 | 5.00 | 2 | |
| TL180 | 1800 | 48 x 53 | 6.30 | 2 | |



TAN:

- Clamping force up to 24,000 N
- Easily adjustable pressure plates
- Removable crank handle
- Very sturdy thanks to I-profile

TB:

- Clamping force up to 14,000 N
- With attached locking bolt
- Tommy bar
- Sturdy thanks to T-profile

TL:

- Clamping force up to 9,900 N
- Easily adjustable pressure plates
- Crank handle
- Very sturdy thanks to I-profile




Pipe clamping set BPC

| Order-No. | For pipes Ø | | Throat depth | kg | qty. | V3 |
|-----------|-------------|-----|--------------|------|------|----|
| | mm | " | mm | | | |
| BPC-H12 | 21.3 | 1/2 | 40 | 0.88 | 4 | |
| BPC-H34 | 26.9 | 3/4 | 42 | 1.30 | 4 | |



- Suitable for steel pipes DN 20 / R 3/4" or DN 15 / R 1/2"
- Outer diameter 26.9 mm or 21.3 mm
- Infinitely-adjustable clamping width
- With stand

For further information
www.bessey.de



Your dealer:

BESSEY Tool GmbH & Co. KG ■ Mühlwiesenstraße 40
 74321 Bietigheim-Bissingen, Germany
 Fon +49 7142 401-0 ■ Fax +49 7142 401-452
 E-Mail: info@bessey.de ■ www.bessey.de